

SN Series

SN Sub-Nanosecond Lasers

DPSS, TEM₀₀, Pulse Picked Lasers

Photronics Industries' SN Series sub-nanosecond lasers redefine precision and power in a compact, all-in-one design. With industry-leading high pulse energies and adjustable pulse widths from 5 nanoseconds to an ultra-fast 500 picoseconds, these lasers deliver unparalleled performance for your most demanding applications.

Unlock the potential of the SN Series in diverse applications, from advanced micro processing to cutting-edge scientific innovations like airborne laser ranging (LIDAR). Achieve faster, more accurate results with high-energy pulses tailored to your needs. Elevate your processes with the SN Series—where performance meets possibility.



APPLICATIONS


- Laser Scribing and Texturing
- Laser-Induced Fluorescence and Imaging (LIF)
- PCB & Polymer Cutting & Drilling
- Glass Cutting and Shaping
- Time-Resolved Spectroscopy and Diagnostics
- High-Precision Marking
- Resistor Trimming
- Medical Micro structuring

FEATURES


- Up to ~1.5mJ Pulse Energy at 100kHz
- True TEM₀₀ Output
- Short Pulse Widths
- Air-cooled with Radiator Cooled Option
- Robust & Compact Form Factor
- Dynamic **Pulse Energy Control - PEC**
- Power Monitoring and Self-Calibration

Specifications – SN Series				
	SN-1064-10	SN-1064-40*	SN-1064-100*	SN-1064-150*
Wavelength	1064nm			
Average Power ¹ @1MHz	10W	40W	100W	150W
Max Pulse Energy @ 100kHz	~100µJ	~400µJ	~1mJ	~1.5mJ
Pulse Width ³	500ps to 5ns			
Pulse repetition rate ⁴	Single shot to 2MHz			
Pulse-to-pulse stability ⁵	<1% rms			
Long-term power stability ²	≤1% rms			
Beam spatial mode & M ²	TEM ₀₀ - M ² <1.2			
Beam divergence (nominal)	~ 2 mrad			
Beam bore sight accuracy	≤ 1 mm lateral (to specified exit location), ≤ 5 mrad angular (to specified exit direction)			
Beam roundness	>90%			
Beam pointing stability	<25 µrad			
Polarization ratio	Vertical; >100:1			
Operational Specifications and Characteristics				
Interface	RS232, Ethernet, Software GUI, External TTL Triggering			
Warm-up time	< 5 minutes from standby, <10 minutes from cold start			
Electrical requirement	15V DC, 13A	32V DC, 15A	32V DC, 28A	60/32V DC, 20/18A
Line frequency	50-60 Hz			
Power consumption ⁶	~200W	~500W	~900W	~1300W
Dimensions ⁷	18 x 5 x 8.90in	16 x 8.5 x 4.5 in.	20 x 8.5 x 4.5 in.	20 x 10 x 4.5 in.
Weight	35lbs [~15.8kg]	~38lbs	~47lbs	~57lbs
Environmental Requirements				
Ambient temperature ²	Ambient 15°C to 30°C (59°F to 86°F) Operating Range			
	Relative humidity 0% to 80% max, non-condensing			
Storage conditions	-10°C to 40°C; sea level to 12000 m			
	0% to 80% relative Humidity, non-condensing			
Cooling system	Air-Cooled	Water-cooled		

[1.] Standard power optimization is at 1 MHz. Output power is specifiable at different pulse repetition rates. Pulse energy varies depending on the repetition rate optimization and specified pulse width. > 3 mJ single pulse energy optimization is available. [2.] Measured over 8 hours ± 1°C. [3.] Specifiable pulse width. Pulse energy varies depending on the specified pulse width. [4.] Lower pulse repetition rate operation, down to single shot, achieved by utilizing PSO or POD features. Higher pulse repetition rates are available [5.] Measured at ambient temperature ± 2°C. [6.] Power consumption data does not include an external chiller's power consumption. [7.] SN Series sub-nanosecond lasers are all-in-one (AIO) and do not require a separate controller or utility module. All connections for operation and control of the laser can be found on the back panel of the AIO laser. [8.] 60V/20A and 32V/28A two connections between laser head and PSU. *Illustration includes some simulated data for conceptual visualization.

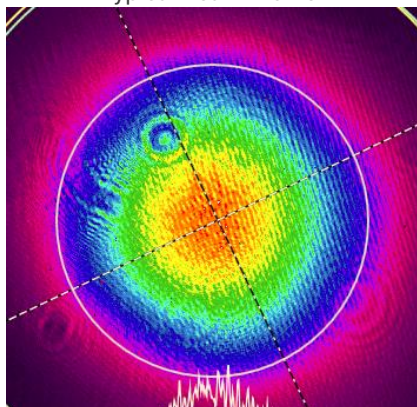
Typical Beam Profile


SN-1064-10

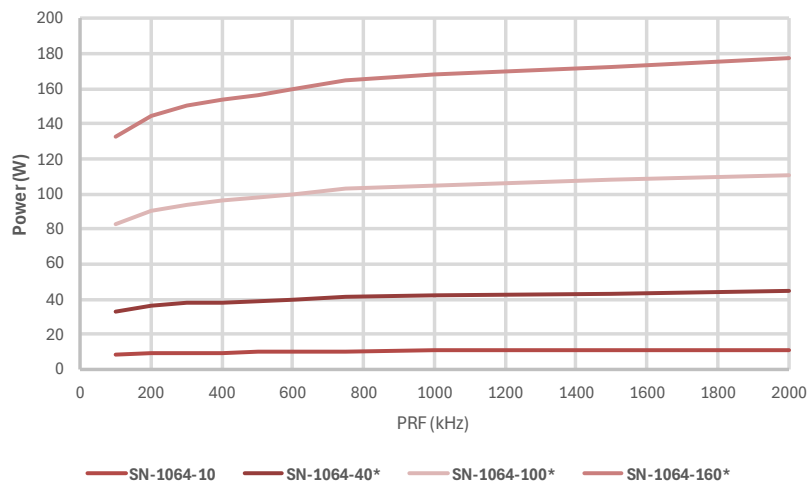
Power Vs. PRF


Specifications – SN Series				
	SN-532-5	SN-532-25*	SN-532-70*	SN-532-100*
Wavelength	532nm			
Max Average Power ¹	5W	25W	70W	100W
Max Pulse Energy @ 100kHz	~150uJ	~250uJ	~700uJ	~1mJ
Pulse Width ³	500ps to 5ns			
Pulse repetition rate ⁴	Single shot to 2MHz			
Pulse-to-pulse stability ⁵	<2% rms			
Long-term power stability ²	≤1% rms			
Beam spatial mode & M ²	TEM ₀₀ - M ² <1.2			
Beam divergence (nominal)	<2 mrad			
Beam bore sight accuracy	≤ 1 mm lateral (to specified exit location), ≤ 5 mrad angular (to specified exit direction)			
Beam roundness	>90%			
Beam pointing stability	<20 μrad			
Polarization ratio	Horizontal; >100:1			
Operational Specifications and Characteristics				
Interface	RS232, Ethernet, Software GUI, External TTL Triggering			
Warm-up time	< 5 minutes from standby, <10 minutes from cold start			
Electrical requirement	15V DC, 13A	32V DC, 15A	32V DC, 28A	60/32V DC, 20/18A
Line frequency	50-60 Hz			
Power consumption ⁶	~200W	~500W	~900W	~1300W
Dimensions ⁷	18 x 5 x 8.90in	16 x 8.5 x 4.5 in.	20 x 8.5 x 4.5 in.	20 x 10 x 4.5 in.
Weight	35lbs [~15.8kg]	~38lbs	~47lbs	~57lbs
Environmental Requirements				
Ambient temperature ²	Ambient 15°C to 30°C (59°F to 86°F) Operating Range			
	Relative humidity 0% to 80% max, non-condensing			
Storage conditions	-10°C to 40°C; sea level to 12000 m			
	0% to 80% relative Humidity, non-condensing			
Cooling system	Air-Cooled	Water-Cooled		

[1.] Standard power optimization is at 1 MHz. Output power is specifiable at different pulse repetition rates. Pulse energy varies depending on the repetition rate optimization and specified pulse width. > 3 mJ single pulse energy optimization is available. [2.] Measured over 8 hours ± 1°C. [3.] Specifiable pulse width. Pulse energy varies depending on the specified pulse width. [4.] Lower pulse repetition rate operation, down to single shot, achieved by utilizing PSO or POD features. Higher pulse repetition rates are available [5.] Measured at ambient temperature ± 2°C. [6.] Power consumption data does not include an external chiller's power consumption. [7.] SN Series sub-nanosecond lasers are all-in-one (AIO) and do not require a separate controller or utility module. All connections for operation and control of the laser can be found on the back panel of the AIO laser. [8.] 60V/20A and 32V/28A two connections between laser head and PSU. *Illustration includes some simulated data for conceptual visualization.

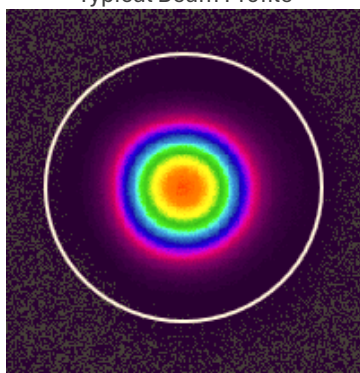
Typical Beam Profile


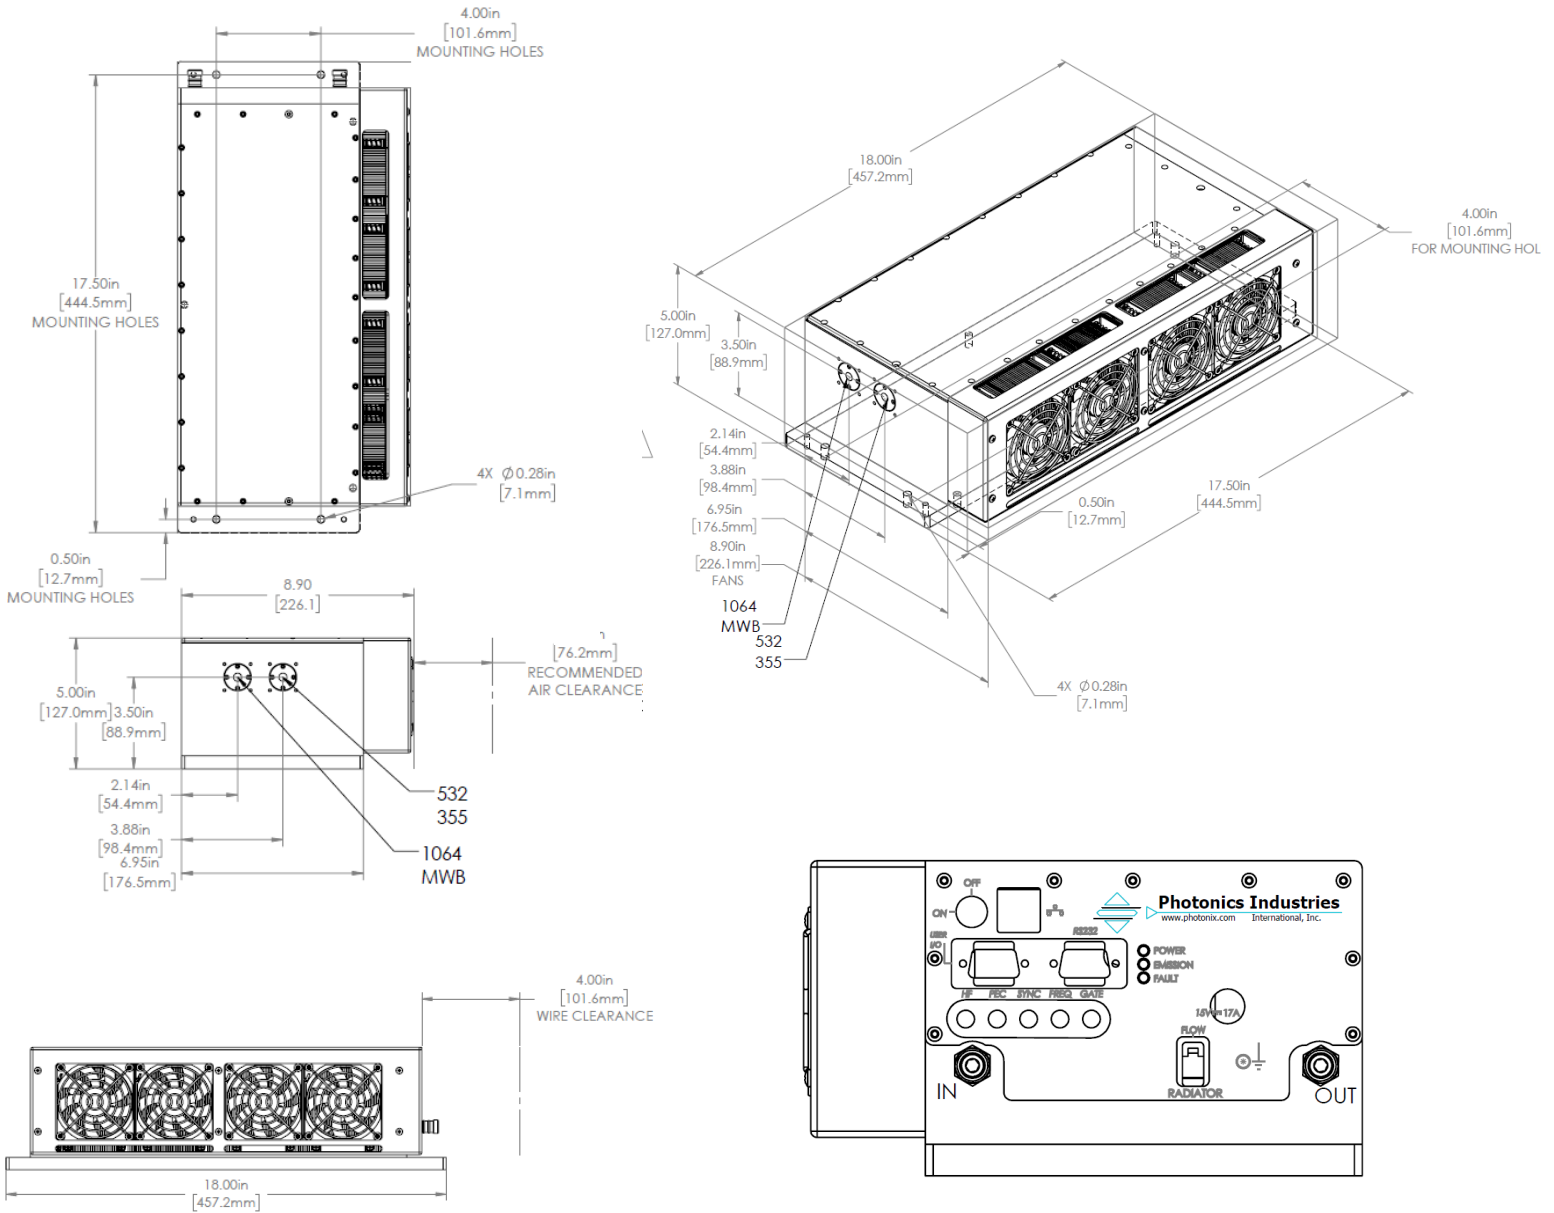
SN-532-5

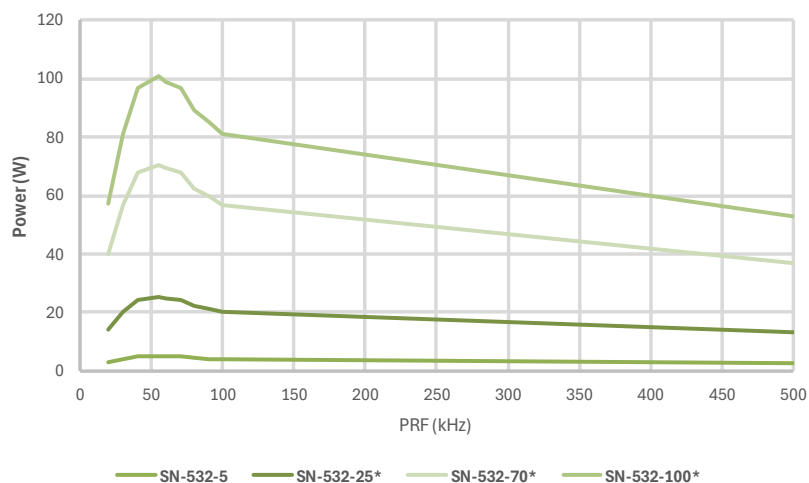Power Vs. PRF


Specifications – SN Series				
	SN-355-3	SN-355-10*	SN-355-28*	SN-355-50*
Wavelength	355nm			
Max Average Power ¹	3W	10W	28W	50W
Max Pulse Energy @ 100kHz	~30μJ	~100μJ	~280μJ	~500μJ
Pulse Width ³	500ps to 5ns			
Pulse repetition rate ⁴	Single shot to 2MHz			
Pulse-to-pulse stability ⁵	<2% rms			
Long-term power stability ²	≤1% rms			
Beam spatial mode & M ²	TEM ₀₀ - M ² <1.2			
Beam divergence (nominal)	~ 2 mrad			
Beam bore sight accuracy	≤ 1 mm lateral (to specified exit location), ≤ 5 mrad angular (to specified exit direction)			
Beam roundness	>90%			
Beam pointing stability	<25 μrad			
Polarization ratio	Vertical; >100:1		Horizontal; >100:1	
Operational Specifications and Characteristics				
Interface	RS232, Ethernet, Software GUI, External TTL Triggering			
Warm-up time	< 5 minutes from standby, <10 minutes from cold start			
Electrical requirement	15V DC, 13A	32V DC, 15A	32V DC, 28A	60/32V DC, 20/18A
Line frequency	50-60 Hz			
Power consumption ⁶	~200W	~500W	~900W	~1300W
Dimensions ⁷	18 x 5 x 8.90in	16 x 8.5 x 4.5 in.	25.5 x 10 x 4.5in	
Weight	35lbs [~15.8kg]	~38lbs	~71lbs	
Environmental Requirements				
Ambient temperature ²	Ambient 15°C to 30°C (59°F to 86°F) Operating Range			
	Relative humidity 0% to 80% max, non-condensing			
Storage conditions	-10°C to 40°C; sea level to 12000 m			
	0% to 80% relative Humidity, non-condensing			
Cooling system	Air-Cooled	Water-Cooled		

[1.] Standard power optimization is at 1 MHz. Output power is specifiable at different pulse repetition rates. Pulse energy varies depending on the repetition rate optimization and specified pulse width. > 3 mJ single pulse energy optimization is available. [2.] Measured over 8 hours ± 1°C. [3.] Specifiable pulse width. Pulse energy varies depending on the specified pulse width. [4.] Lower pulse repetition rate operation, down to single shot, achieved by utilizing PSO or POD features. Higher pulse repetition rates are available [5.] Measured at ambient temperature ± 2°C. [6.] Power consumption data does not include an external chiller's power consumption. [7.] SN Series sub-nanosecond lasers are all-in-one (AIO) and do not require a separate controller or utility module. All connections for operation and control of the laser can be found on the back panel of the AIO laser. [8.] 60V/20A and 32V/28A two connections between laser head and PSU. *Illustration includes some simulated data for conceptual visualization.

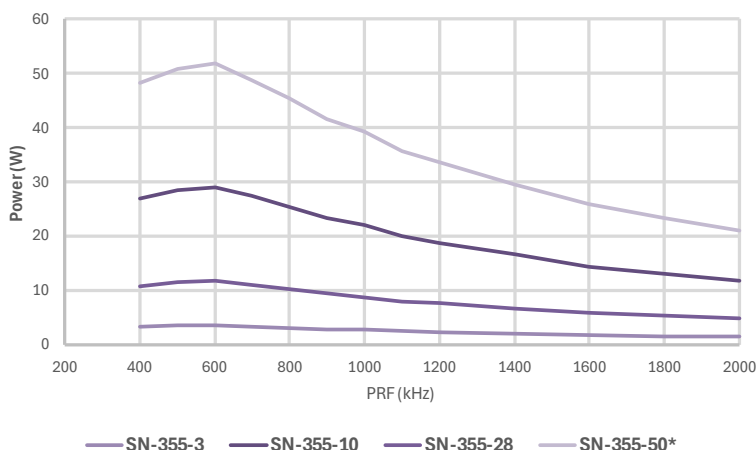Power Vs. PRF


Dimensional Drawings
SN-1064-10, SN-532-5, SN-355-3

Options:




Multi-wavelength	Multi-wavelength output, blended or selectable	[MWB], [MWS]
Deep Ultraviolet (DUV)	266nm Wavelength available upon request	[SN-266]
Rad-cooling™	Rad-cooling™ system instead of air-cooling fans	[RC]

Format	SN-1064/532/355	-	[Power level]	-	[xxx]
--------	-----------------	---	---------------	---	-------

Dimensional Drawings

SN-1064-40, SN-532-25, SN-355-10




*The SN1 model depicted is a future release and is expected to be available in Q3 2025. Specifications and availability are subject to change. For information on currently available models, please contact us

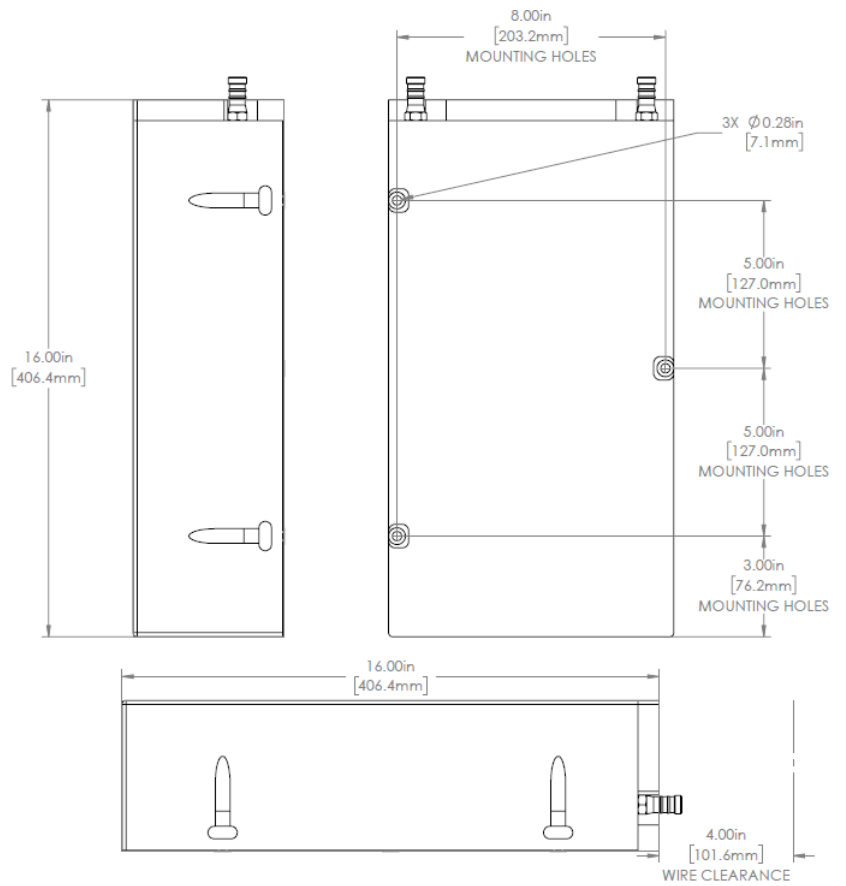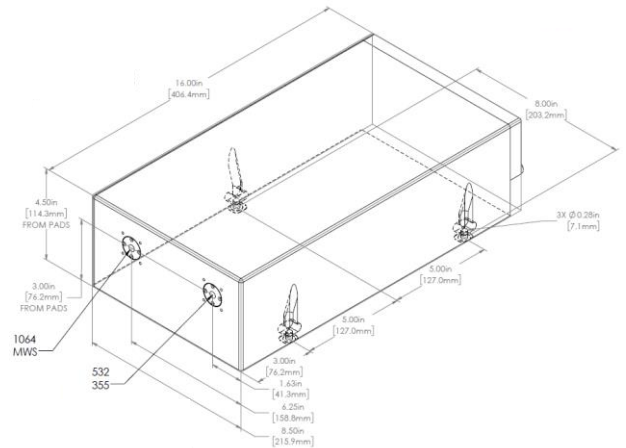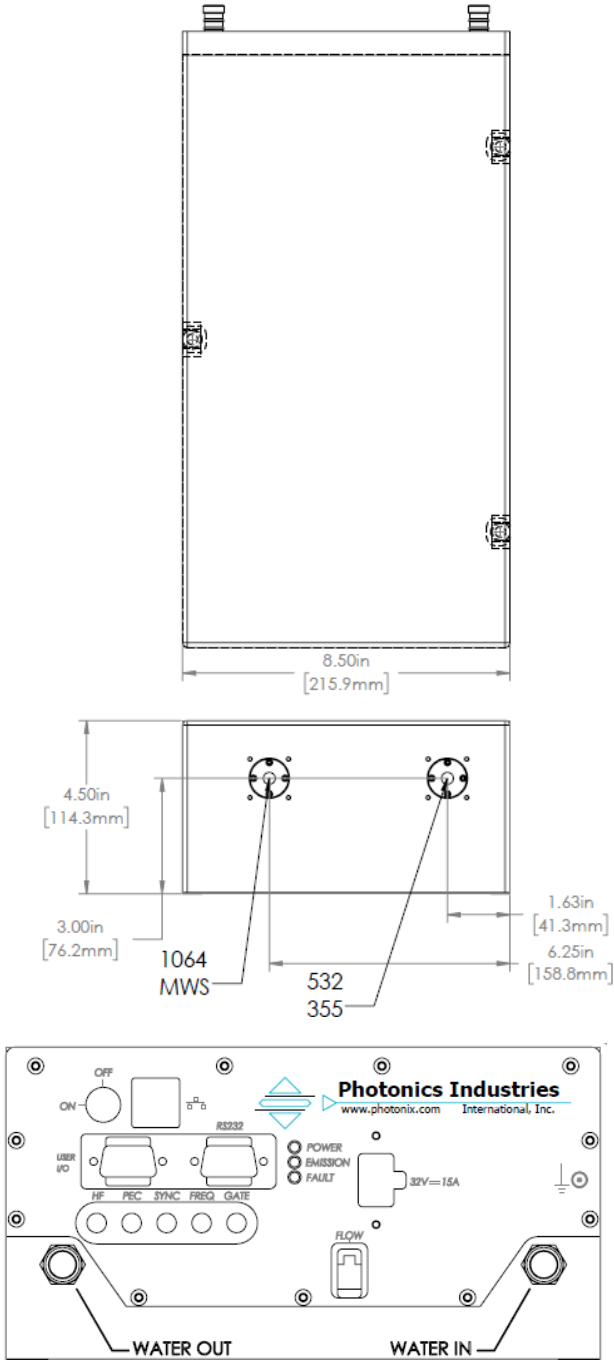

Options:

Multi-wavelength	Multi-wavelength output, blended or selectable	[MWB], [MWS]
Deep Ultraviolet (DUV)	266nm Wavelength available upon request	
Format	SN-1064/532/355/266	- [Power Level] - [xxx]

Dimensional Drawings SN-1064-100, SN-532-70

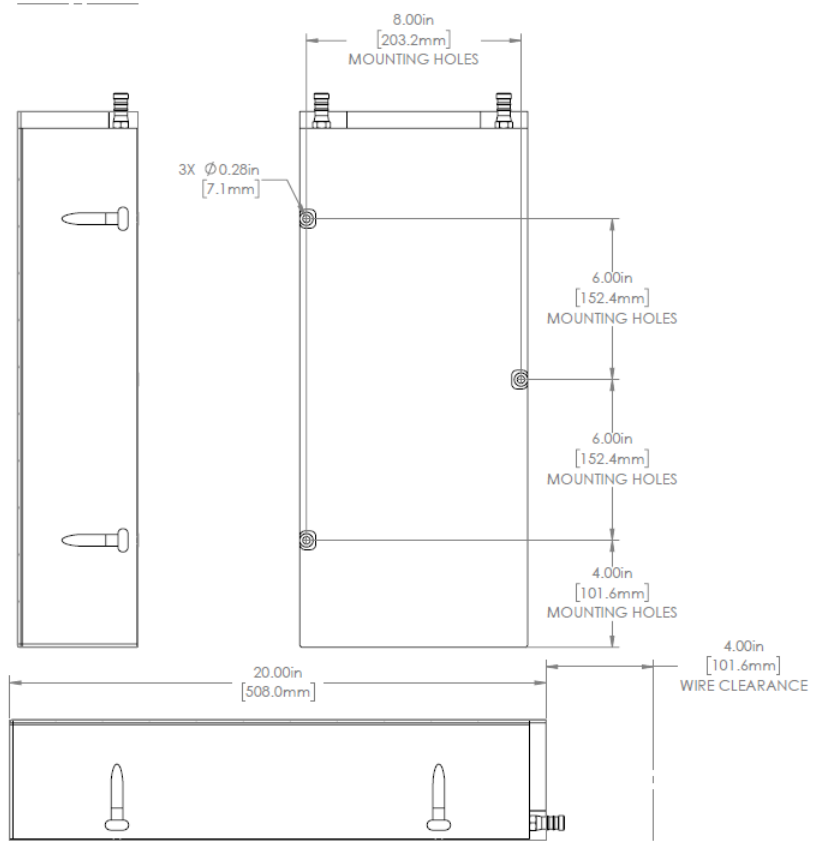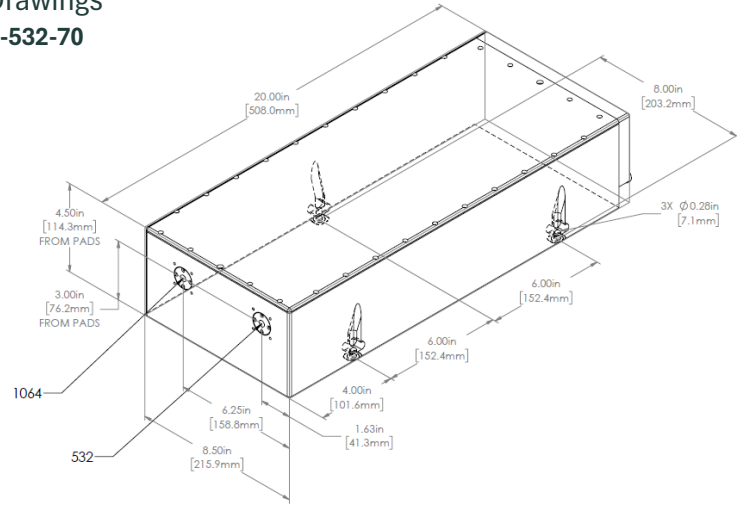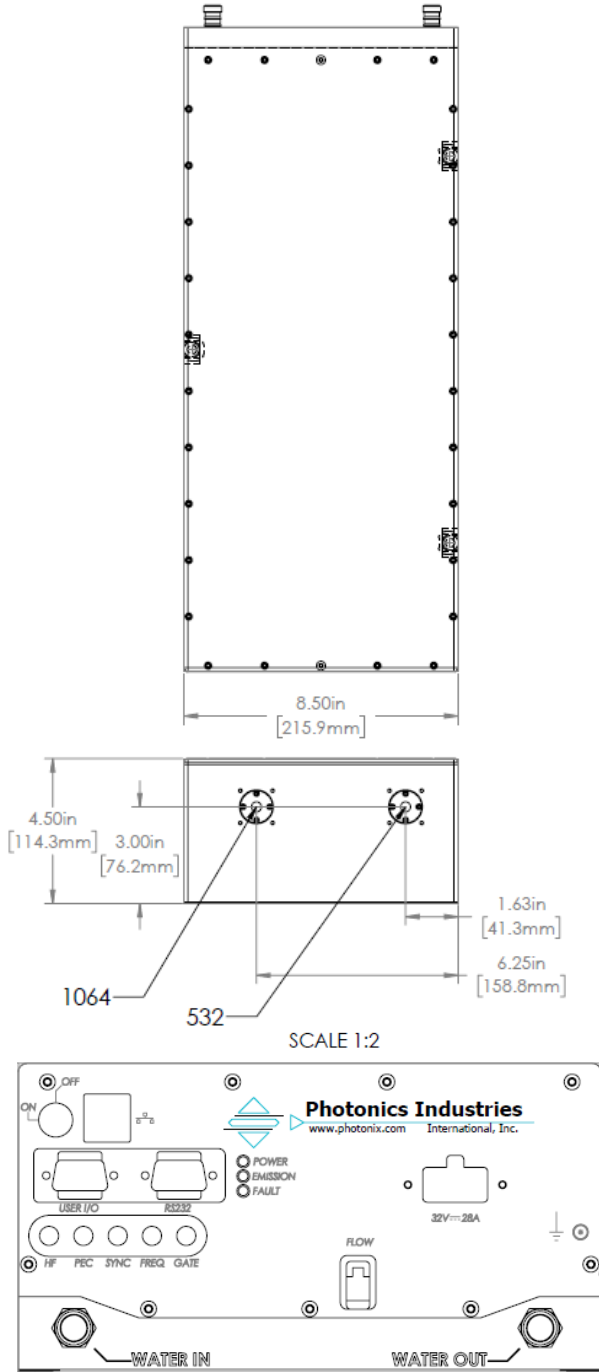





Options:

Multi-wavelength	Multi-wavelength output	[MWB]
------------------	-------------------------	-------

Format	SN-1064/532	-	[Power Level]	-	[xxx]
--------	-------------	---	---------------	---	-------

Dimensional Drawings

SN-1064-150, SN-532-100

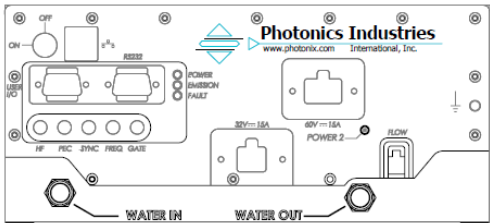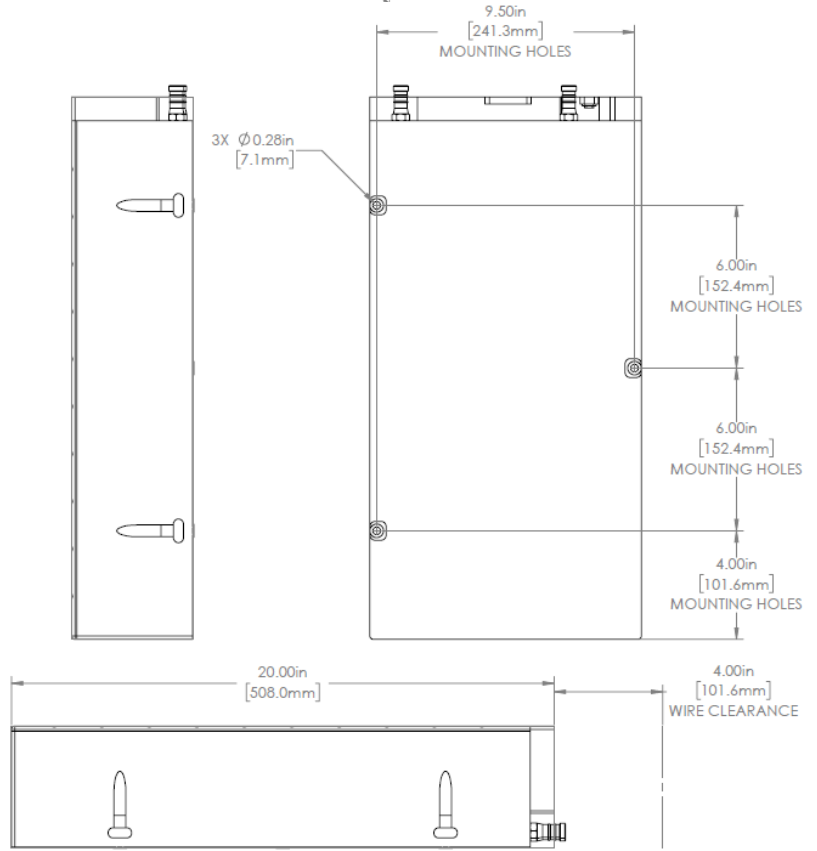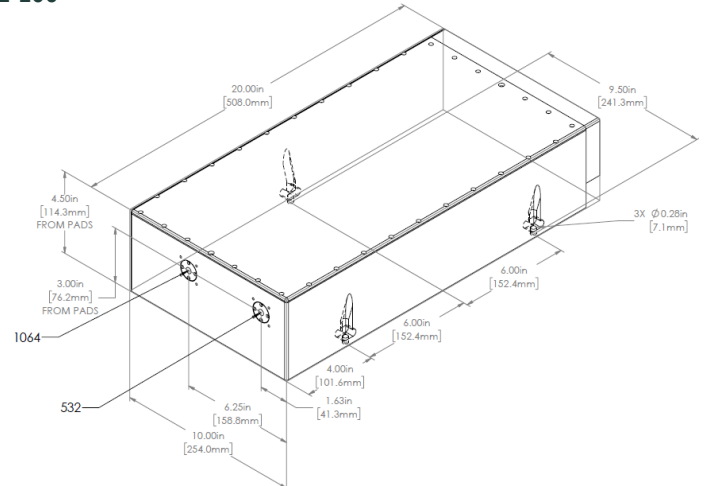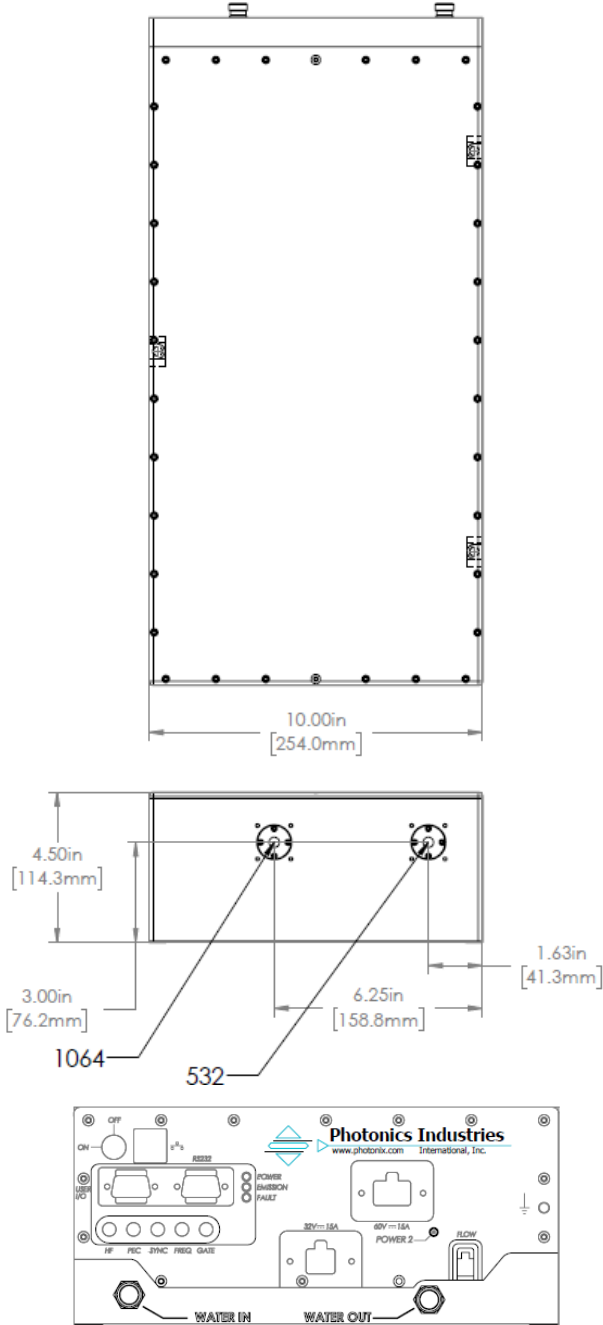







Options:

Multi-wavelength	Multi-wavelength output, blended	[MWB]
------------------	----------------------------------	-------

Format	SN-1064/532	-	[Power Level]	-	[xxx]
--------	-------------	---	---------------	---	-------


Dimensional Drawings

SN-355-28

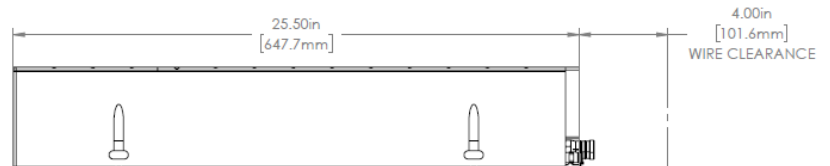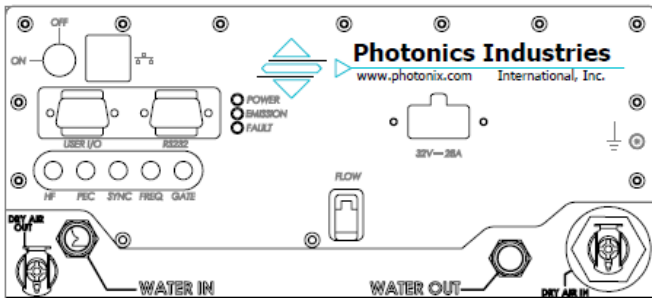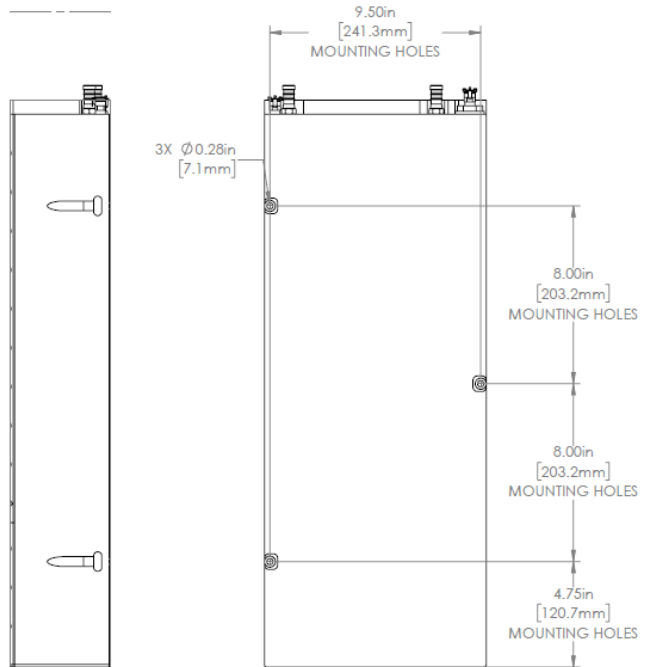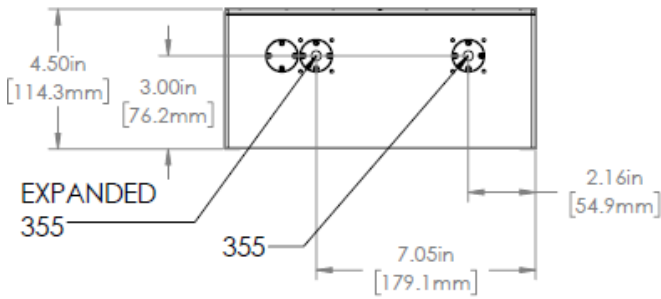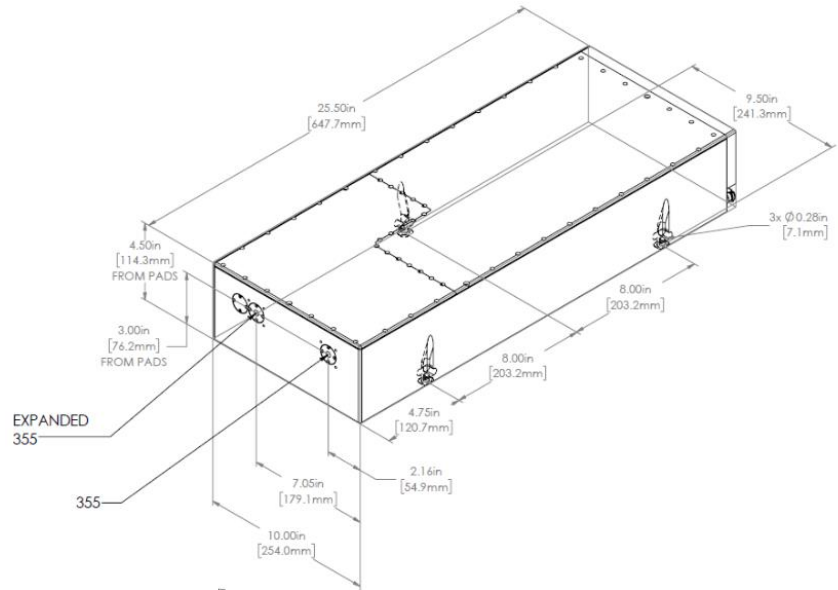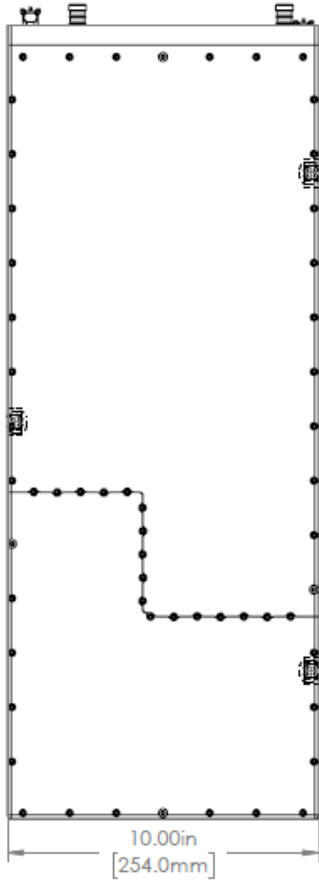

Dimensional Drawings

SN-355-50

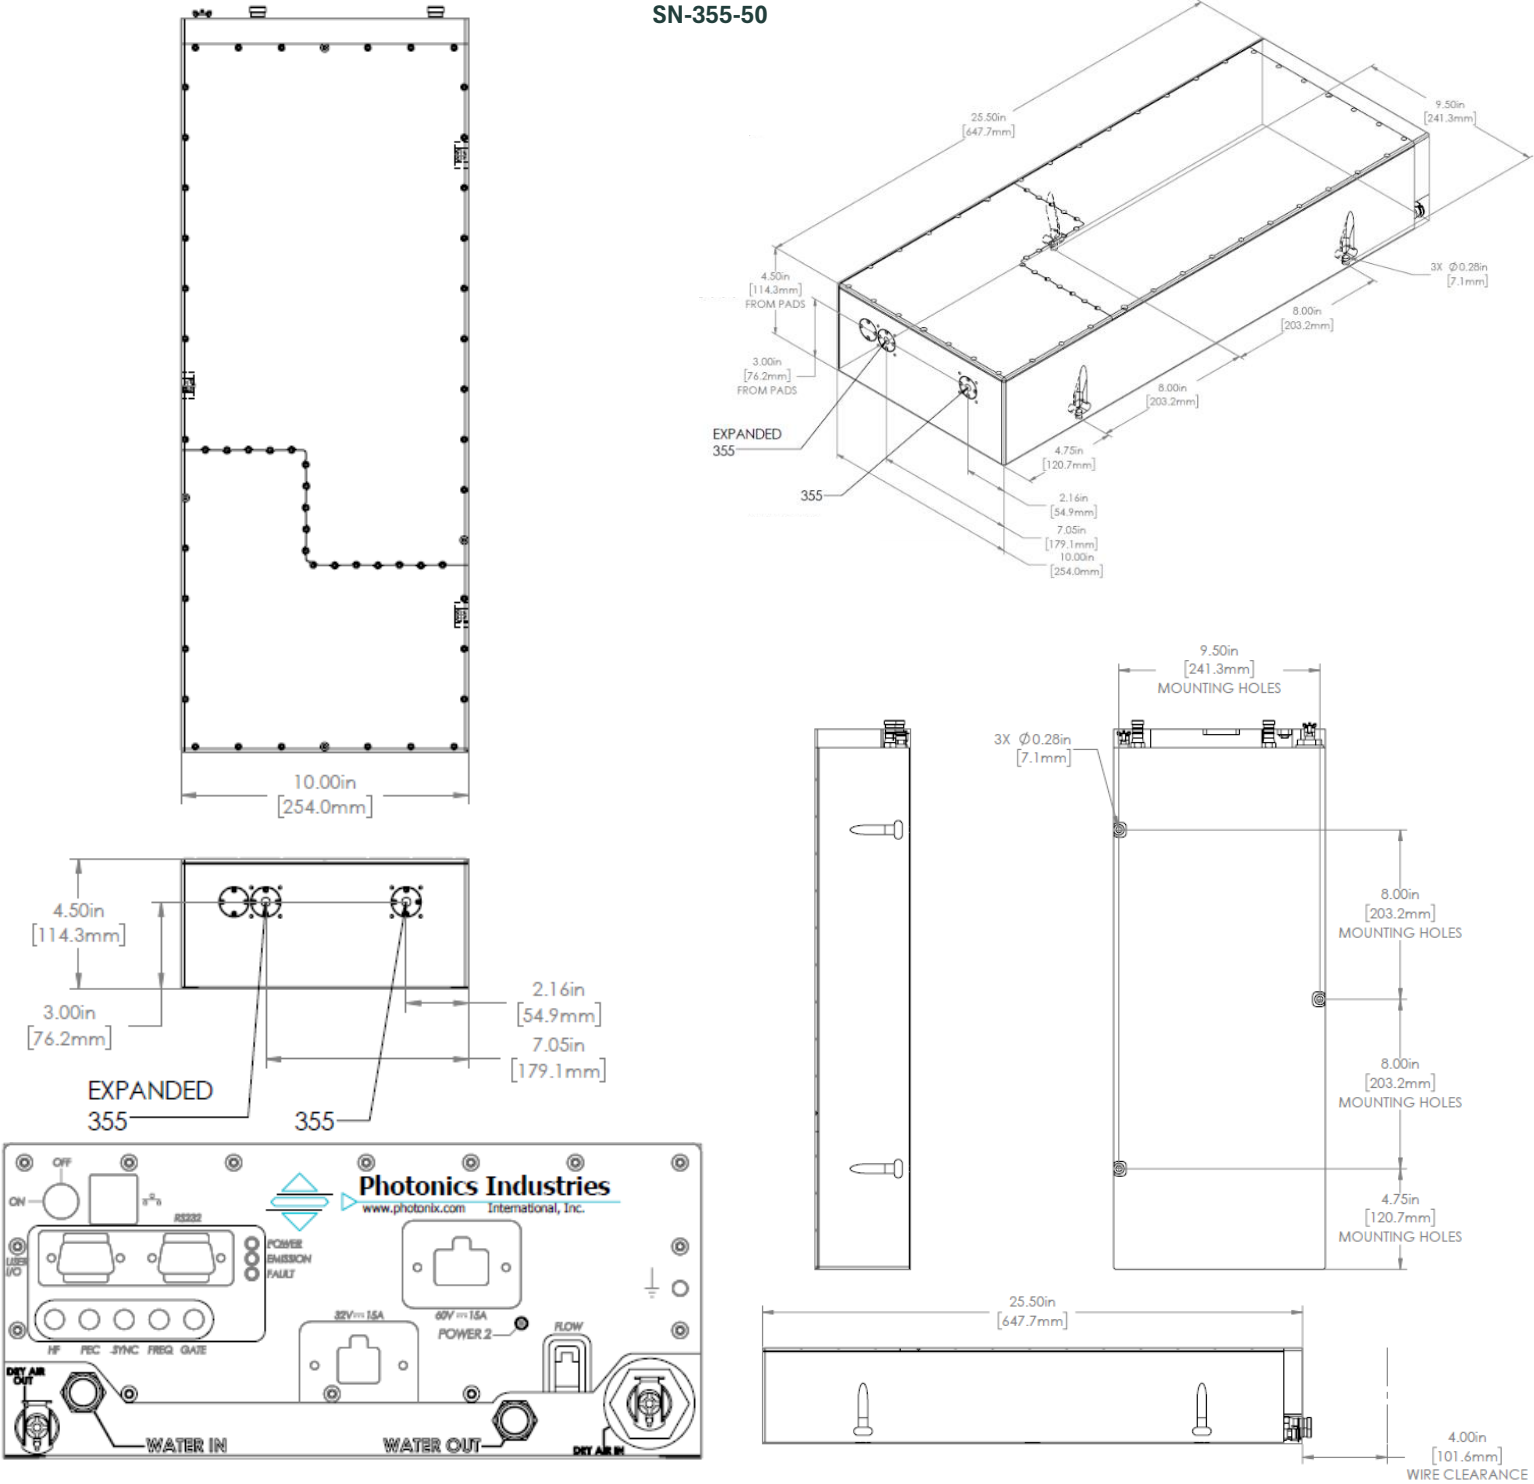

© 2025 Photonics Industries International, Inc.

Headquarters: 1800 Ocean Ave, Ronkonkoma, New York 11779, United States

Photonics Industries International Inc. is the pioneer of intracavity harmonic lasers and is at the forefront of developing, manufacturing, and marketing a wide range of nanosecond, sub-nanosecond, picosecond, and femtosecond lasers for the industrial, scientific, defense and medical industries.

For more information www.photonix.com



光と人をつなぐ

Rayture Systems



レイチャーシステムズ株式会社

〒160-0006 東京都新宿区舟町7 ロクサンビル7F

TEL : 03-3351-0717 FAX : 03-3351-6771

URL : <http://www.rayture-sys.co.jp>

E-mail : laser@rayture-sys.co.jp